


# MSE PERC 60A

## High Power Rooftop 60 Cell Module All-Black PERC with 5 Busbar Technology

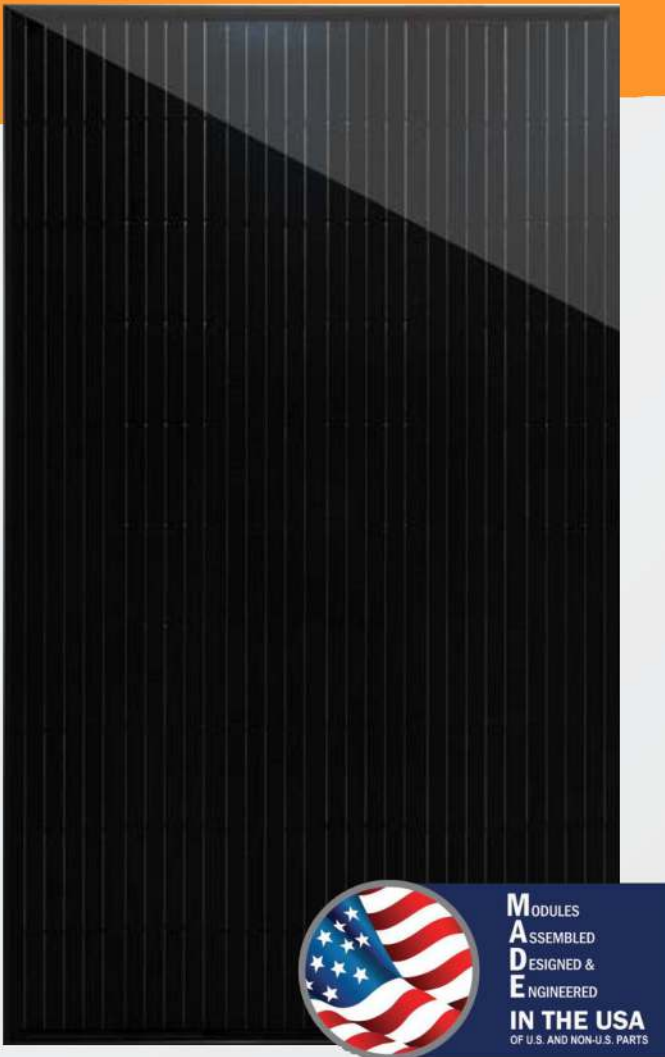

### CERTIFIED RELIABILITY

- > Tested to UL1703 standards
- > PID Resistant



### SUPERIOR AESTHETICS

- > All-black design coupled with outstanding power output
- > Ideal for residential & commercial applications



### EXCELLENT WEATHER RESILIENCE


- > 3600 Pa snow load (75 psf) tested to UL1703

25-YEAR

PERFORMANCE WARRANTY

12-YEAR

PRODUCT WARRANTY

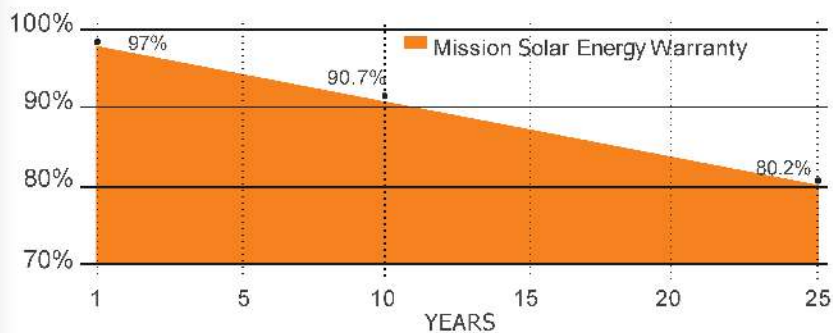

# 310W

CLASS LEADING POWER OUTPUT

# 19.1%

MODULE EFFICIENCY

# -0 +5W

POSITIVE POWER TOLERANCE



MISSION SOLAR ENERGY



# MSE PERC 60A

## ELECTRICAL SPECIFICATIONS

Electrical Parameters at Standard Test Conditions (STC)

Module Type		MSE60A310	
Power Output	P <sub>max</sub>	W <sub>p</sub>	310
Module Efficiency		%	19.1
Tolerance			-0 +5W
Short-Circuit Current	I <sub>sc</sub>	A	10.21
Open-Circuit Voltage	V <sub>oc</sub>	V	41.14
Rated Current	I <sub>mp</sub>	A	9.40
Rated Voltage	V <sub>mp</sub>	V	32.97

## TEMPERATURE COEFFICIENTS

Normal Operating Cell Temperature (NOCT)	46.7°C(±2°C)
Temperature Coefficient of P <sub>max</sub>	-0.38%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.28%/°C
Temperature Coefficient of I <sub>sc</sub>	0.04%/°C

## OPERATING CONDITIONS


Maximum System Voltage	1,000VDC
Operating Temperature Range	-40°C to +85°C
Maximum Series Fuse Rating	20A
Fire Rating	TYPE 2
Front & Back Load	Design load 50psf (Max. load 75psf tested to UL1703)

## MECHANICAL DATA

Solar Cells	P-type mono-crystalline silicon (156.75mm)
Cell Orientation	60 cells (6x10), 5-busbar
Module Dimensions	1640mm x 992mm x 40mm (64.57in. x 39.06in. x 1.57in.)
Weight	19.0kg (41.9lb)
Front Glass	3.2mm (0.126in.) tempered, low-iron, anti-reflective coating
Frame	Anodized aluminum alloy
Encapsulant	Ethylene vinyl acetate (EVA)
J-Box	Protection class IP67 with 3 bypass-diodes
Cables	PV wire, 1m (39.37in.), 4mm <sup>2</sup> / 12 AWG
Connector	MC4 compatible

## SHIPPING INFORMATION

Container/FT	Pallets	Panels	310W
53'	32	832	257.92kW
40'	28	728	225.68kW

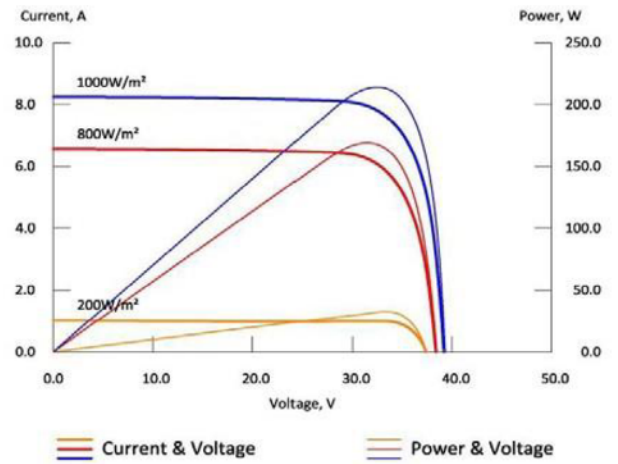

Current-voltage characteristics with dependence on irradiance

## BASIC DESIGN [ UNITS: Inch ( mm) ]

