


MNEVO2012, 3012, 2224 or 4024 WITH 1 CLASSIC

	BATT BREAKER	PV BREAKER	PV WIRE
CL150	MNEDC100	MNEDC70	#4 AWG
CL200	MNEDC80	MNEDC60-300	#6 AWG
CL250	MNEDC70	MNEDC60-300	#6 AWG

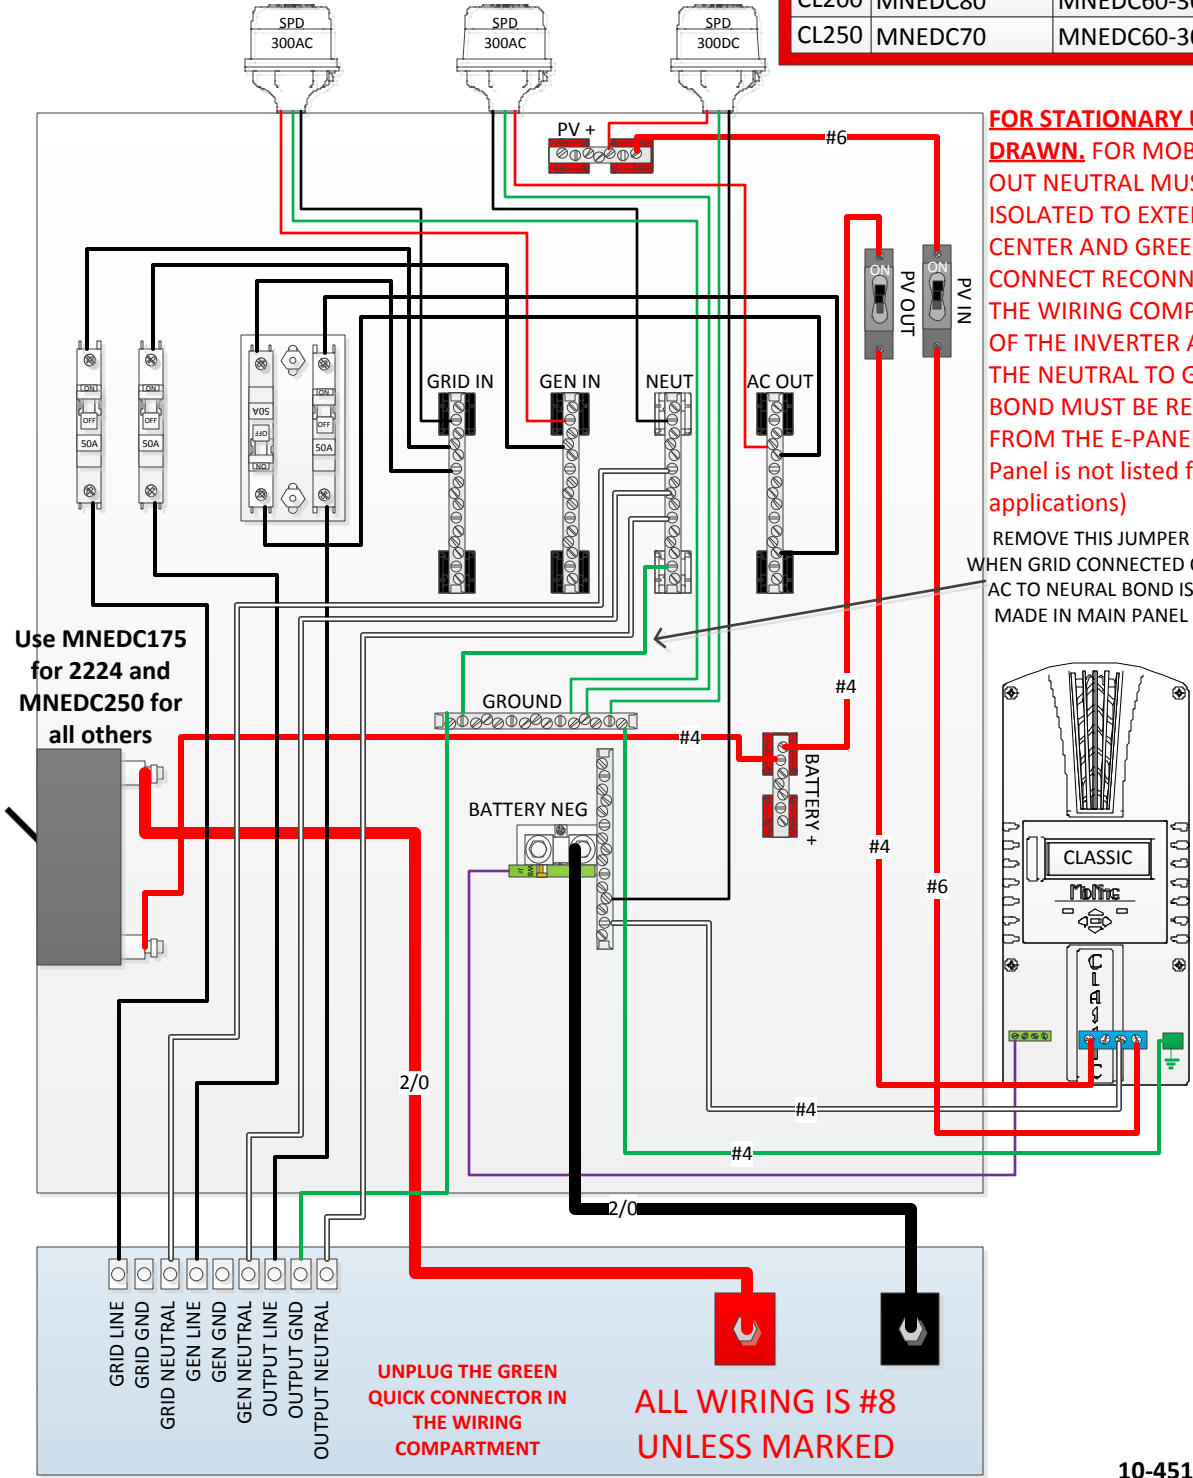

FOR STATIONARY USE AS DRAWN. FOR MOBILE USE AC OUT NEUTRAL MUST BE ISOLATED TO EXTERNAL LOAD CENTER AND GREEN QUICK CONNECT RECONNECTED IN THE WIRING COMPARTMENT OF THE INVERTER AS WELL AS THE NEUTRAL TO GROUND BOND MUST BE REMOVED FROM THE E-PANEL (Note E-Panel is not listed for mobile applications)

REMOVE THIS JUMPER WHEN GRID CONNECTED OR AC TO NEUTRAL BOND IS MADE IN MAIN PANEL

Use MNEDC175 for 2224 and MNEDC250 for all others

UNPLUG THE GREEN QUICK CONNECTOR IN THE WIRING COMPARTMENT

ALL WIRING IS #8 UNLESS MARKED