

# AMERESCO SOLAR

Green • Clean • Sustainable



Ameresco Solar supplies and distributes a complete line of enclosures to accommodate a wide range of off-grid applications. We have a large selection of enclosures and control cabinets ranging from single battery (for pole and ROHN towers) to custom skid-mounted, multi-battery enclosures. Our enclosure line has the flexibility to meet your solar system storage needs.

## BBA-1 Series Features:

### UL Listed

- UL 508A, NEMA 3R (Standard)
- NEMA 3R, NEMA 4, NEMA 4X

### Available Material and Finish

- Mill finished aluminum
- Powder coated aluminum (White)
- Stainless steel (304 or 316)

### Enclosure Dimensions

- Overall: (H) 20.625" x (W) 17.5" x (D) 12"
- Opening: (H) 13.25" x (W) 14.125"
- Inside: (H) 15.875" x (W) 16" x (D) 11"

### Back Panel Dimensions

- (H) 14.125" x (W) 13"


### Battery Capacity

- (1) Class: 27 Series
- (1) Class: 31 Series
- (2) Class: U1 Series

### Weight

- 22 lbs



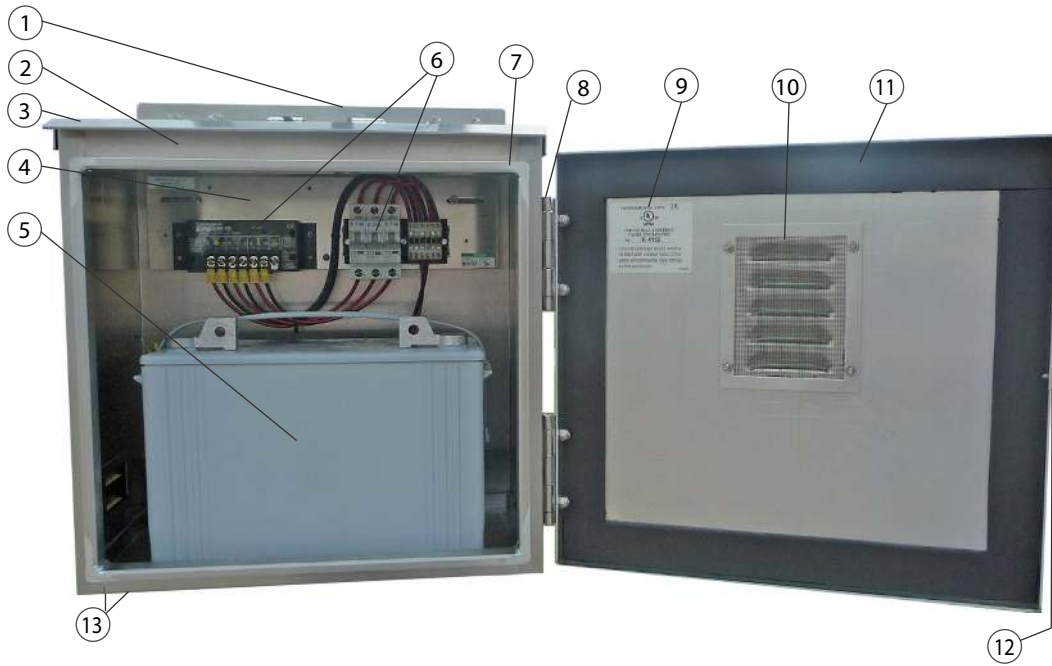

- ① Mounting Tab
- ② BBA-1 Cabinet
- ③ Rain Drip Lip
- ④ Back Panel
- ⑤ Battery (Not included)
- ⑥ Electrical Assembly (Not included)
- ⑦ Double Flanged Door Opening
- ⑧ Stainless Steel Hinge
- ⑨ UL Listing/NEMA Rating
- ⑩ Fiberglass "Insect Proof" Screen on all Louvered Openings
- ⑪ Closed Cell Neoprene Gasket
- ⑫ Stainless Lockable Draw Latch
- ⑬ (2) 1/2" NPT Knock-outs (CGB's/Conduit fittings)

## Mounting Structures



Mounts on wall using 4 lag bolts  
(Bolts not included)



Mounts to ROHN25 tower using 4 u-bolts  
(Bolts not included)



Mounts to 2-3" schedule 40 pole using 2 u-bolts  
(Bolts not included)

## Enclosure Options



Custom designed assembly sized to meet solar system requirements



Door fans available in 12V, 24V, and 48V DC/120V AC



Banding available for unique mounting structures

### Additional Options:

- Breather/drain for NEMA4 - 4X (Required for all battery applications)
- Heat strips (120V, 150W with thermostat)
- Interior insulation (Low E)
- Sun shields (Available for top, sides, and door)
- Key lock (#1 or #2 Pelco)