

SLP150-12 (CLASS 1 DIVISION 2)

High Efficiency Multicrystalline PV Module




Certified to UL1703 and cUL1703
Certified for Hazardous Environments
C1D2 - Class 1, Division 2

Electrical Characteristics	SLP150-12
Product code	150011234
Maximum power (Pmax)	150W
Voltage at Pmax (Vmp)	18.5V
Current at Pmax (Imp)	8.11A
Open-circuit voltage (Voc)	22.2V
Short-circuit current (Isc)	8.68A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 5%


*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
*NOCT: Nominal operating cell temperature (the data is only for reference)




Module Diagram

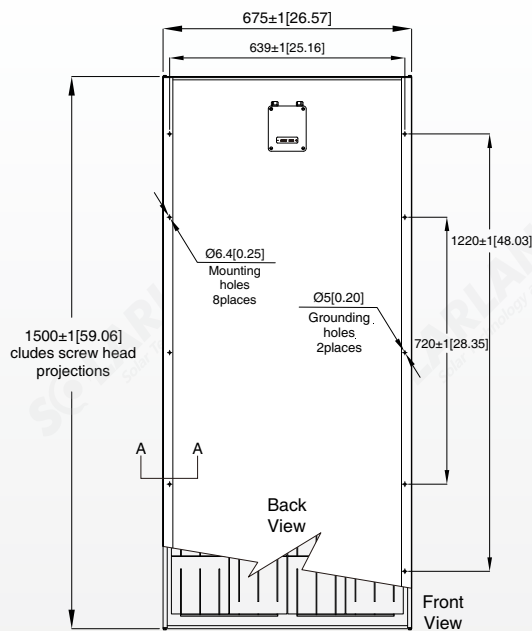

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit: mm[in.]



Junction Box
Top View(Lid Open)




Section A-A

Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

Characteristics

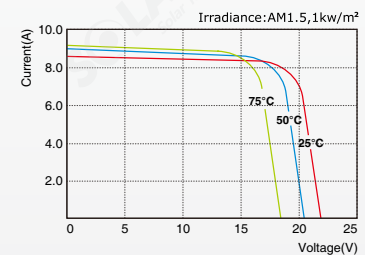

SLP150-12 I-V Curves

Specifications	SLP150-12
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module dimension	1500mm[59.06in.],x675mm[26.57in.],x50mm[1.97in.]
Weight	12.1kg[26.68lbs]
Packing information(Carton)	1545mm[60.83in.],x720mm[28.35in.],x85mm[3.35in.]/(1pc/ctn)

*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.
*Specifications are subject to change without notice at any time.